


Whiteline Kiiltojet C2SP

Spray cleaning unit

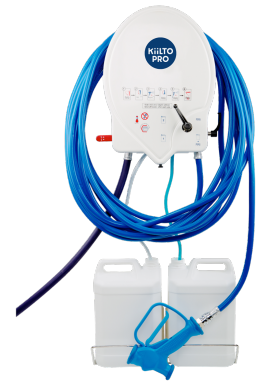

Kiiltojet spray cleaning unit makes cleaning of floors and other surfaces much easier and faster in any facility where washing with water is possible. Economical and effective solution for i.e. commercial kitchens, food industry and swimming halls.

Use of the unit is simple and clear, since there is only one switch to select the desired function. Kiiltojet is compatible with two different cleaning detergents simultaneously, such as an alkaline and disinfection detergent. Changing from one detergent to another is done by selecting the wanted product from the switch and without any need to move the hose from one canister to another.

Kiiltojet gives a significant savings in just working time alone, since same unit can be used for spreading the detergent and to do the rinsing. No difficult replacing and changing of hoses or rinsing out the injector when changing chemicals.

The correct dosage is continuously ensured. The dosage is adjusted by selecting the correct plastic nozzle, which is installed in to the detergent output hose. The nozzles come in 14 different sizes, ranging from 0,5 to 10 %. Accurate dosage is necessary in order to obtain a good cleaning result and easier rinsing.

The unit works with the pressure from the water supply network. Connection between the water supply and the unit is done with a quick connector, and there is no need for electrical or pressurized air connections. Changing of brushes, rinsing tube or washing nozzle is also done via a quick connector.

Kiiltojet is very mobile and easy to position in different types of facilities, since there is no need for a separate hose mount. The unit comes with the mount, and if necessary can be detached from the frame and installed into the desired location. Two different versions are available: 4062249 wall-mountable unit and 4070011 unit with a built-in transport trolley. The trolley is also available as an optional accessory, allowing even greater mobility.

Application

For cleaning of surfaces in e.g. kitchens, food industry, swimming halls and washrooms

Technical specifications

Net weight	5,0 kg
Water inlet pressure	2-6 bar
Flow rate, rinsing	12 l/min (3 bar)
Flow rate, washing	7 l/min
Hose length	15 m
Operating temperature, max.	+ 50 °C
Material, frame	Glass fiber, PP
Unit width (without tubes)	260mm
Unit length (without tubes)	380mm
Unit depth (without tubes)	90mm

Country of manufacture

FRANCE

Package size / Product code

Sales unit	Product Code	GTIN
1 x 1 pcs	4062249	
1 x 1 pcs	4062256	
1 x 1 pcs	4070011	

**Standard accessories**

Hose, 15 m	4062278
Foaming pistol	4062367
Foaming nozzle	4062368

Optional accessories

Transport trolley, white	4062260
Hose reel, automatic	4062350
Rinsing tube	4062268

**Additional
information**

Check the updated version of a paper brochure on our website at www.kiilto.com or send an e-mail to our customer service at asiakaspalvelu@kiilto.com.